

Specification of Digital MEMS Microphone

RoHS Compliance & Halogen Free


Model: SD10B263-J01

Eng.No: SA1511012

Designed By: Ester 11.15

Checked By: Richard 11.15

Approved By: Nina 11.15



Customer:

P/N of Customer:

Approved By: _____

Address: Unit 2112-2113 , 21/F, International Trade Centre, 11-19 Sha Tsui Road,
Tsuen Wan, Hong Kong
Website: www.hk-sound.com
E-mail: sales@hk-sound.com

Tel: 852-2304 4000
Fax: 852-2304 7000

[illegible]

DO NOT REPRODUCE FOR OUTSIDE USE WITHOUT WRITTEN PERMISSION



SOUND COMPONENTS LIMITED

Contents

1. Introduction	4
2. Electrical Characteristics	4
3. Timing Characteristics	5
4. Frequency Response Curve	5
5. Test Setup	6
6. Measurement Circuit	6
7. Mechanical Characteristics	7
7.1. Weight	7
7.2. Appearance Drawing	7
8. Application	8
8.1. Pickup Tool Pick Location&PCB Solder Pad Layout	8
8.2. Recommended Reflow Process Condition	8
8.3. Storage Condition	9
9. Packing	9
9.1. Tape Specification	9
9.2. Reel Specification	10
9.3. Packing Quantity	11
9.4. Packing Information	11
10. Reliability Test	12

MEMS Microphone

1. Introduction


The SD10B MEMS Microphones are integrated with specialized Pre-amplification ASIC to provide high sensitivity, high SNR output from a capacitive audio sensor. It's packaged for surface mounting and high temperature re-flow assembly.

2. Electrical Characteristics


Test Condition: $V_{DD}=1.8V$, $F_{clk}=2.4MHz$, L/R grounded, $23\pm 2^{\circ}C$, $55\pm 10\%R.H.$, Unless otherwise specified.

Items	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Directivity		Omni-directional				
Sensitivity	S	94dB SPL @1kHz	-29	-26	-23	dB
Current Consumption	I_{DD}	Normal mode		650	800	uA
	I_{SLEEP}	Sleep mode			50	uA
S/N Ratio	SNR	94dB SPL @1kHz A-weighted		60		dB
Total Harmonic Distortion	THD	94dB SPL @1kHz S=Typ,0			0.5	%
Acoustical Overload Point	AOP	10% THD @1kHz S=Typ,		120		dB SPL
Power Supply Rejection	PSR	100mVpp Squarewave @217Hz, A-weighted		-70		
Supply Voltage	V_{DD}		1.64		3.6	V
Data Format			$\frac{1}{2}$ cycle PDM			
Clock Frequency	Fclk		1.0	2.4	3.25	MHz
Clock Duty Cycle			40		60	%
Logic Low Input/Output Voltage			-0.35		$0.35 \cdot V_{DD}$	V
Logic High Input/Output Voltage			$0.65 \cdot V_{DD}$		$V_{DD} + 0.3$	V
Short Circuit Current	I_{sc}	Grounded output pin	1		10	mA
Load Capacitance	C_{load}				100	pF


3. Timing Characteristics

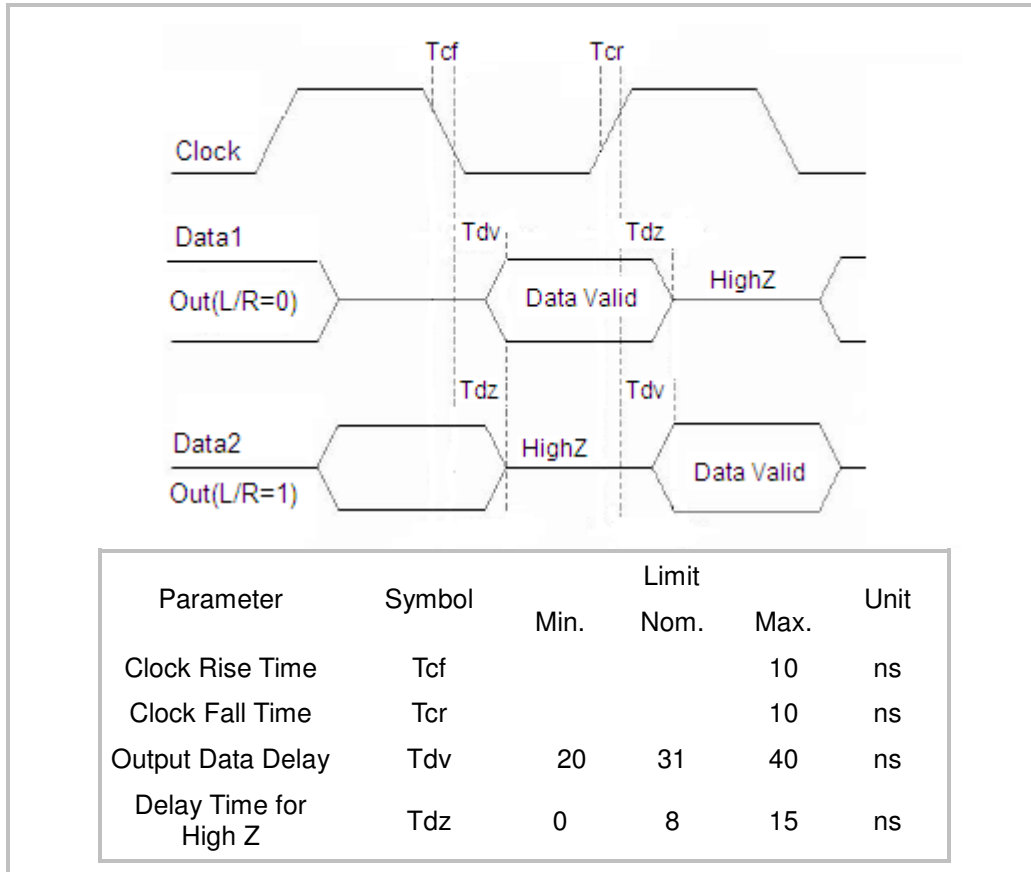


4. Frequency Response Curve

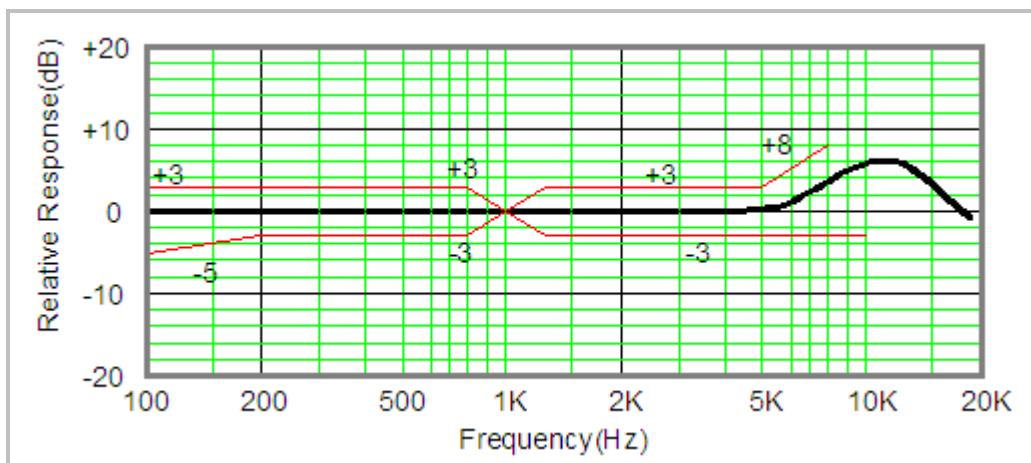

5. Test Setup (Sensitivity Test in Anechoic Room)

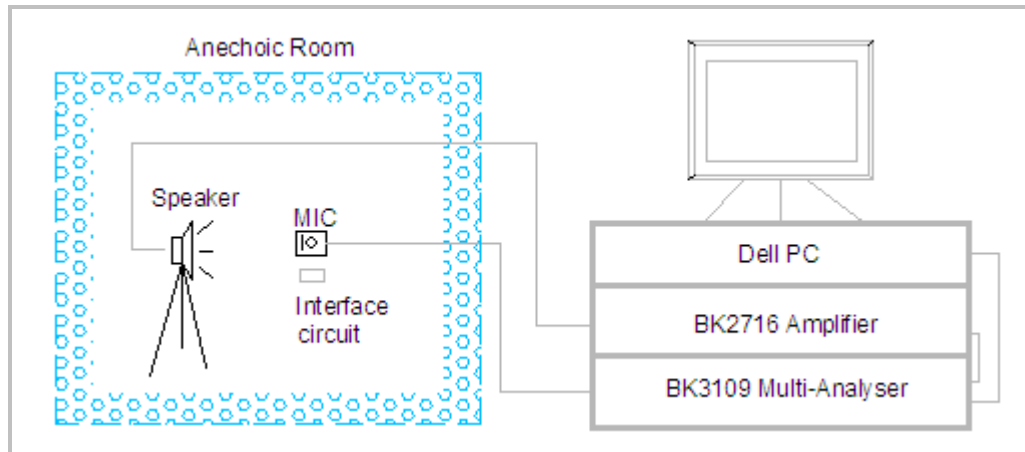


6. Measurement Circuit

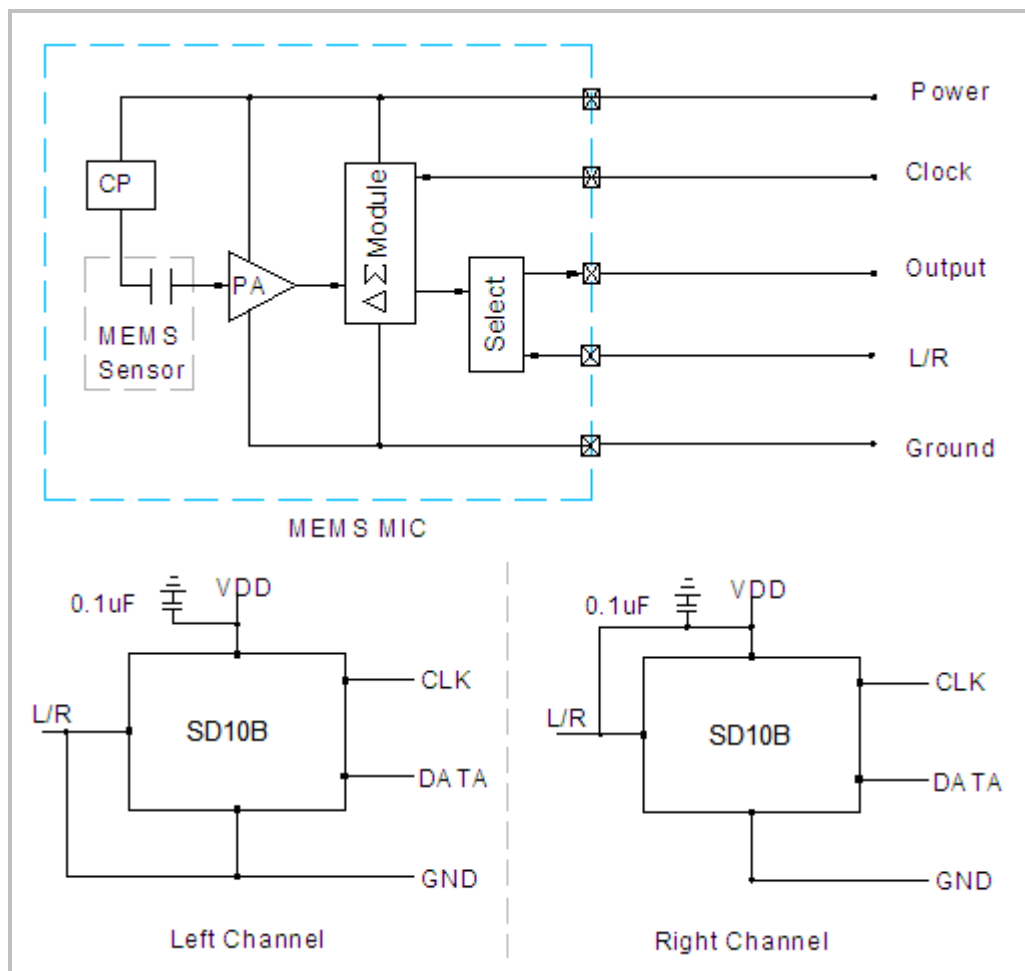

7. Mechanical Characteristics


7.1 Weight: Less than 0.3g

7.2 Appearance Drawing(unit: mm)

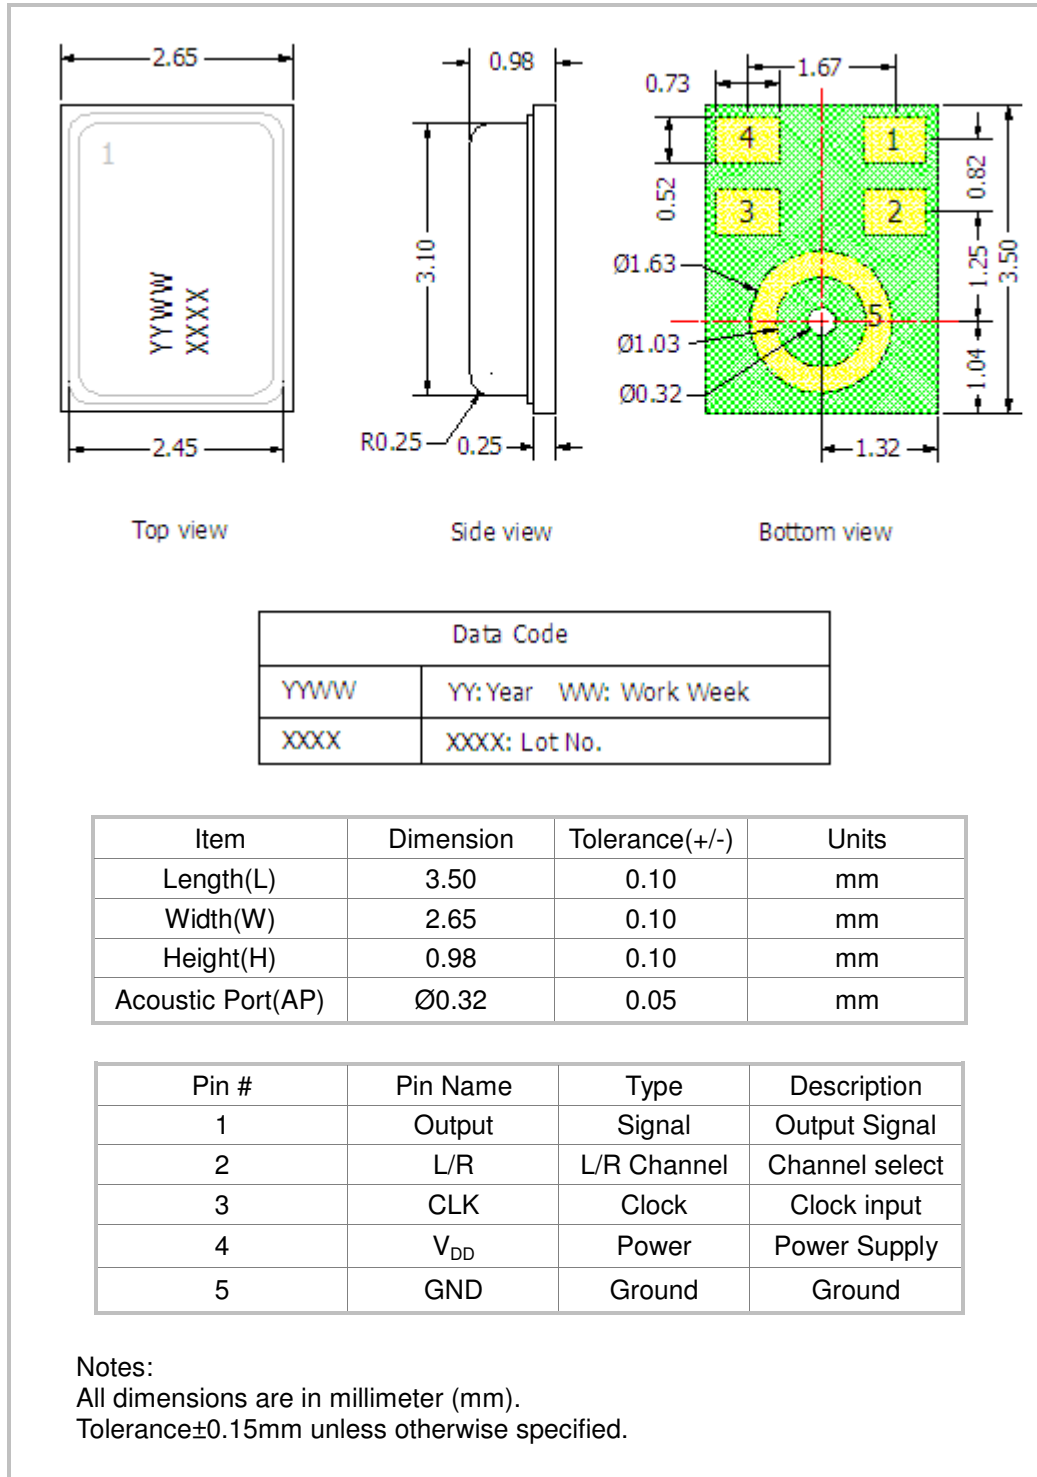


8. Application

8.1 Pickup Tool Pick Location & PCB Solder Pad Layout

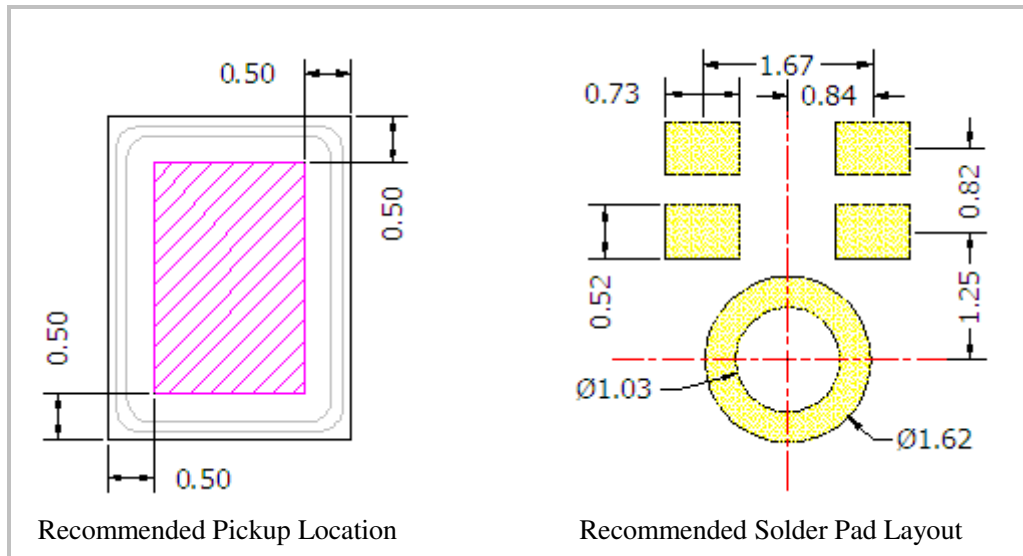

8.2 Recommended Reflow Process Condition

Recommend Re-flow Profile, solder reflow $\leq 260^{\circ}\text{C}$ (for 30s Max of peak temperature).

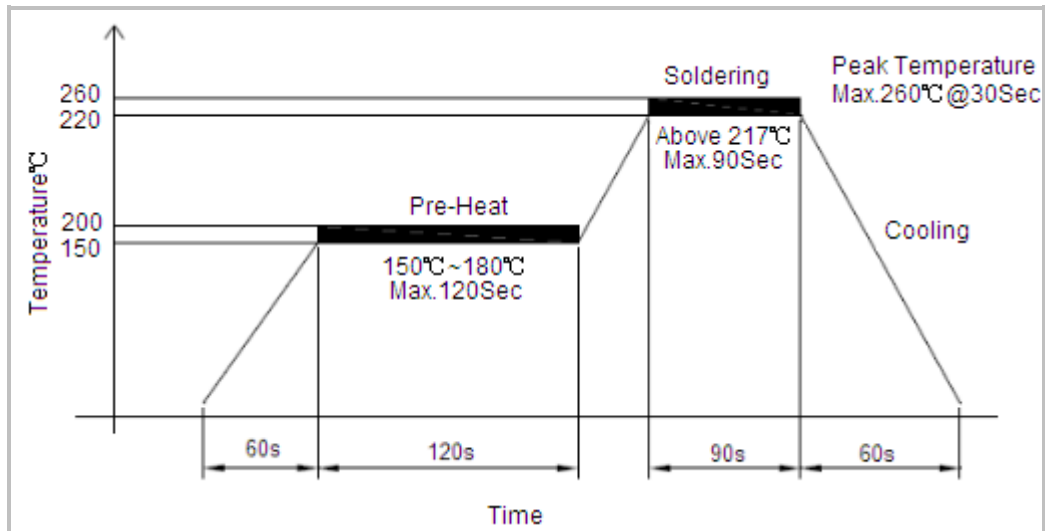

Important Notes

In order to minimize device damage:

1. Do not board wash or clean after the reflow process.
2. Do not apply over 0.3Mpa of air pressure into the port hole.
3. Do not expose to ultrasonic processing or cleaning.
4. Do not pull a vacuum over port hole of the microphone.


8.3 Storage Condition

8.3.1 Storage temperature range:-40~+125℃.

8.3.2 Operating temperature range:-40~+100℃.

9. Packing

9.1 Tape Specification

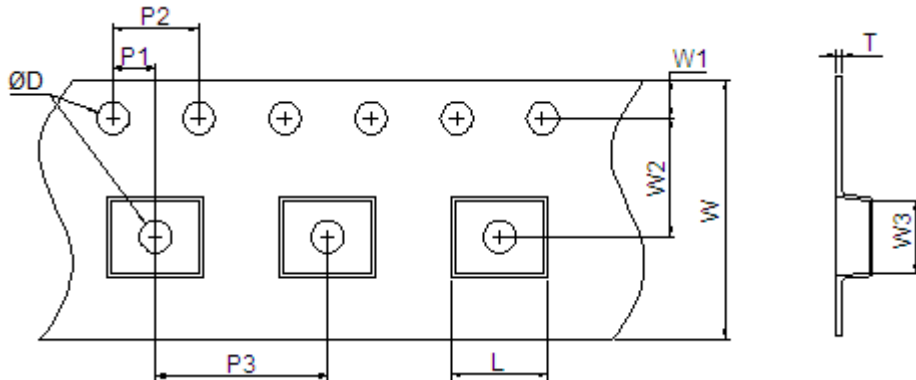


Symbol	Dimension		
	Minimum	Nominal	Maximum
φD	1.5	1.5	1.6
P1	1.9	2.0	2.1
P2	3.9	4.0	4.1
P3	7.9	8.0	8.1
L	3.7	3.8	3.9
W	11.7	12	12.3
W1	1.65	1.75	1.85
W2	5.4	5.5	5.6
W3	2.85	2.95	3.05
T	0.25	0.3	0.35

Notes

All dimensions are in millimeter (mm).

Tolerance±0.15mm unless otherwise specified.

9.2 Reel Specification

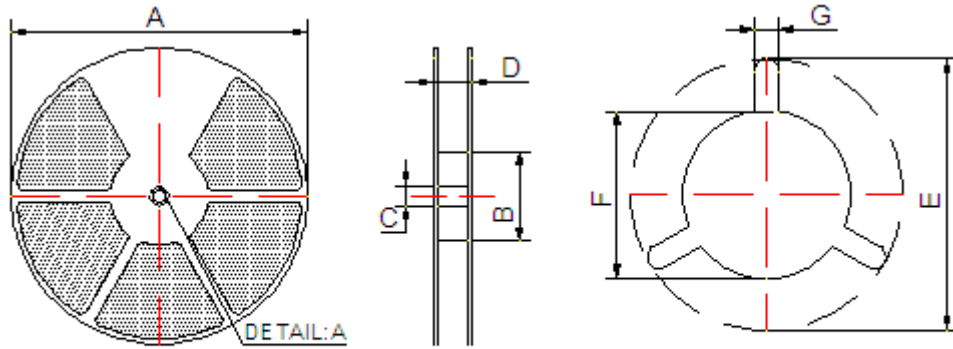

Top View

Side View

DETAIL:A

7" Reel

Description	Symbol	Dimension (mm)		
		Minimum	Nominal	Maximum
Reel Diameter	A	-	180	-
Hub Diameter	B	58	60	62
Hub Hole Diameter	C	12.8	13	13.5
Reel Width(Measured at hub)	D	-	16	16.4
Arbor Hole	E	20.2	-	-
Arbor Hw in mm Diameter	F	12.8	13.0	13.5
Arbor Slot Width	G	1.5	-	-


13" Reel

Description	Symbol	Dimension (mm)		
		Minimum	Nominal	Maximum
Reel Diameter	A	-	330	-
Hub Diameter	B	98	100	102
Hub Hole Diameter	C	12.8	13	13.5
Reel Width(Measured at hub)	D	-	18	18.4
Arbor Hole	E	20.2	-	-
Arbor Hw in mm Diameter	F	12.8	13.0	13.5
Arbor Slot Width	G	1.5	-	-

Notes

All dimensions are in millimeter (mm).

9.3 Packing Quantity

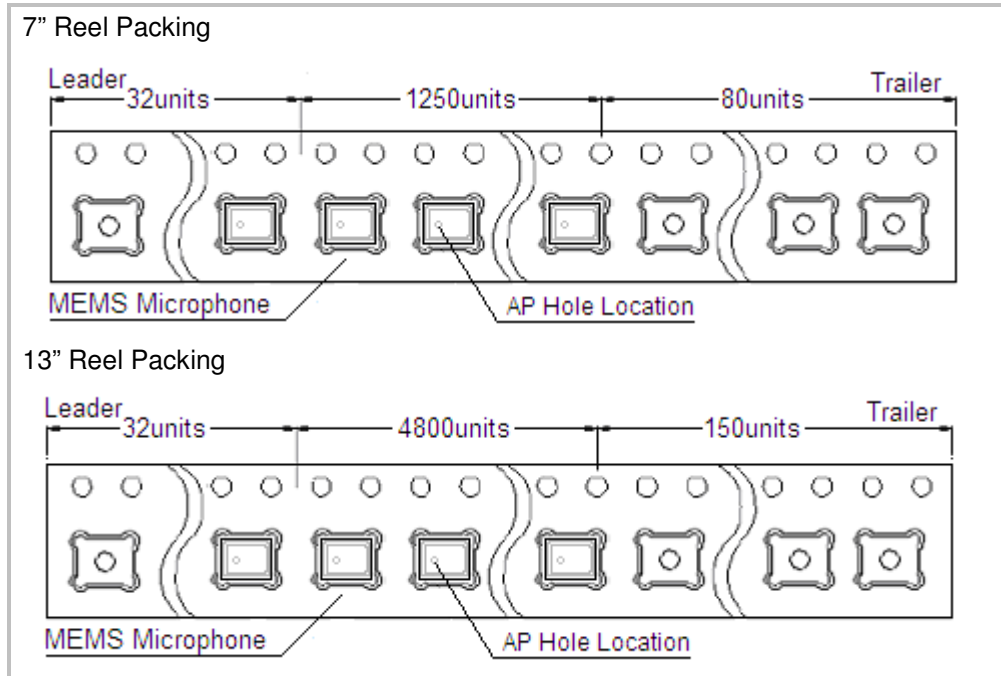

9.4 Packing Information

Tape & Reel 7"

Qty/reel	Weight/reel	Reel/Carton	Qty/carton	Weight full	Dimension carton Box	Storage
Pcs	Kg	Nos	Nos	Load(kg)	(LxWxH)mm	Temp
1250	0.25	4	5000	~3.00	272 x 159 x 236	-10℃~50℃

Tape & Reel 13"

Qty/reel	Weight/reel	Reel/Carton	Qty/carton	Weight full	Dimension carton Box	Storage
Pcs	Kg	Nos	Nos	Load(kg)	(LxWxH)mm	Temp
4800	0.7	10	48000	~10.00	419 x 276 x 381	-10℃~50℃

10. Reliability Test

Item	Detail	Standard
Simulated Reflow (Without Solder)	Samples for qualification testing require 3 passes 260±5 °C reflow solder profiles. 2 hours of setting time is required between each reflow profile test.	±2 dB
Static Humidity	Precondition at +25°C for 1 hour. Then expose to +85°C with 85% relative humidity for 1000 hours. Finally dry at room ambient for 3±1 hours before taking final measurement.	±3 dB
Temperature Shock	Each cycle shall consist of 30 minutes at -40°C, 30 minutes at +125°C with 5 minutes transition time. Test duration is for 30 cycles, starting from cold to hot temperature.	±3 dB
ESD Sensitivity	Perform ESD sensitivity threshold measurements for each contact according to MIL-STD-883G, Method 3015.7 for Human Body Model. Identify the ESD threshold levels indicating passage of 8000V Human Body Model.	±3 dB
Random Vibrations	Vibrate randomly along three perpendicular directions for 30 minutes in each direction, 4 cycles from 20Hz~2000Hz with a peak acceleration 20g.	±3 dB
Mechanical Shock	Subject samples to half sine shock pulses (3000g±15% for 0.3ms) in each direction, totally 18 shocks.	±3 dB
Operation Life	Subject samples to +125°C for 168 hours under full maximum rated voltage.	±3 dB
Drop Test	The test was repeated in six directions for three times, Dropped from 1.5m height on to a steel surface, total 18 times and inspected for mechanical damage. Note: Sensitivity should vary within +/-3dB from initial sensitivity after test conditions are performed.	±3 dB